



IPBX-400

IP-PBX for SOHO/SMB



IPBX-400 is an IP PBX equipment designed for SOHO, Small and Medium Business applications. IPBX-400 integrates 4 analog ports (FXO/FXS) to support the existing analog phone lines or PSTN trunks. It provides Ethernet port for the connection to the Internet Telephone Service Providers (ITSP) to cut telephone bill when long distance calls are routed through the Internet.

IPBX-400 provides the full PBX features including auto attendant, conferencing, voice mail, IVR, call forward on busy or no answer, blind transfer, supervised transfer, call parking/queuing, music on hold, remote office support, etc. It has a built-in SIP proxy and supports extension registrations and configurable dial plan. It supports SIP compliant devices as peers: IP phones, soft phones, ATA and voice gateways.

Web based configuration and management are provided in the IPBX-400. Web call feature is provided in the IPBX-400.



IPBX-400

VoIP Solution

Features:

- Built-in SIP proxy server, support SIP compliant devices as peers: IP phones, soft phones, ATA and voice gateways
- Support ITU G.711, G.726, G.729, G.723.1, and GSM voice codecs and echo cancellation
- Support basic calls, call transfer, forwarding, parking, pickup, and hunting
- Support voice mails, conference room
- Support Remote Office connections
- Support system expansions (Inter PBX)
- Configurable dial plan
- Make phone calls via SIP service providers
- Web based configuration and management
- Provide Web Call service (option)

HARDWARE SPECIFICATIONS

IPBX-400:


- 1 Ethernet port
- 2 FXO ports
- 2 FXS ports
- 1 SD port
- LED: Power and 4 LED for FXS/FXO ports
- Power: + 12V DC
- Temperature: 0 to 45 °C
- Humidity: up to 90% non-condensing
- Mechanical Dimension (L * W * H)
IPBX-400 115 * 123 * 25 mm

ANNEAL TECHNOLOGY INC.

Web: www.anneal.com.tw

email: sales@anneal.com.tw

IPBX-400

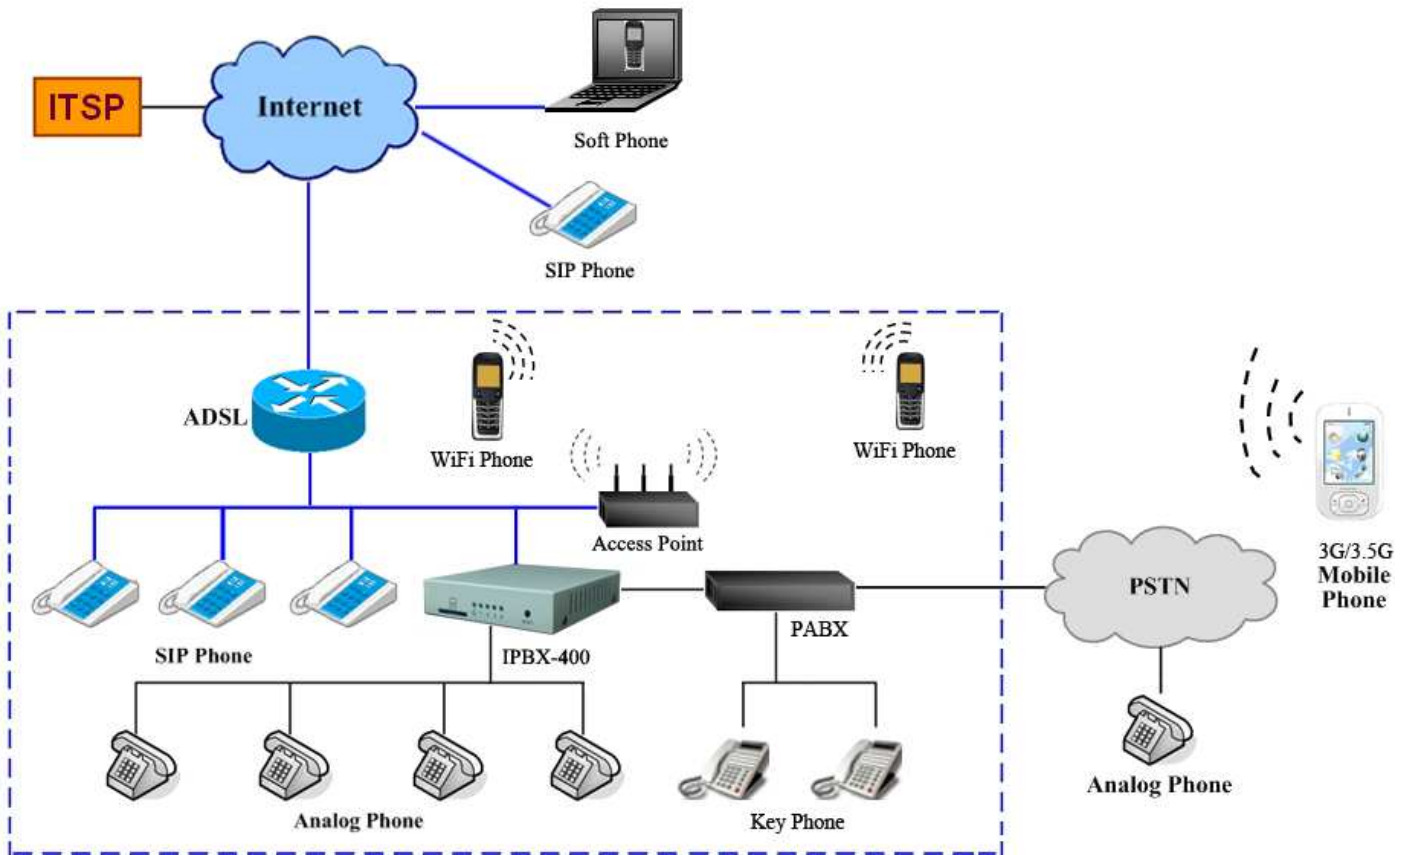

Main Office/Branch Office Applications

